



UD18-22C62F1

UD18

FORK SENSORS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

Type	part no.
UD18-22C62F1	6090204

Other models and accessories → www.sick.com/UD18

Detailed technical data

Features

Functional principle	Ultrasonic detection principle
Housing design	Cylindrical
Dimensions (W x H x D)	18 mm x 18 mm x 63.2 mm
Installation distance	20 mm ... 60 mm, 40 mm ± 3 mm (default setting)
Fork width	60 mm (corresponds to max. mounting distance)
Blind zone	7 mm ... 7 mm (from sender and receiver)
Permissible angle deviation	± 45° perpendicular to material layer
Detectable material	Paper with grammages: 20 g/m ² ... 2,000 g/m ² Plastic sheets and foils: ≤ 0.4 mm Self-adhesive films, metal sheets: ≤ 0.3 mm Corrugated cardboard: single wall F, N and G flute sizes Washi Wafer PCB
Label detection	✓
Resolution	1 material layer
Display	2 x LED
Adjustment	IO-Link, SOPAS Engineering Tool, Connect+ Software (CPA), cable (Control input C3)
Additional function	3 selectable sensitivity levels Teach-in of up to 4 individual sensitivity level Sensitivity level changeover during operation Configurable via IO-Link, SOPAS and Connect+ software
Output time	2 ms, trigger mode: < 0.5 ms
Safety-related parameters	
	MTTF _D 101 years

Interfaces

IO-Link	✓, V1.1
Data transmission rate	COM3 (230,4 kBaud)
Cycle time	2 ms

¹⁾ Outputs Q₁ and Q₂ short-circuit protected.

²⁾ Push-pull: PNP/NPN HIGH = U_V - (< 3 V) / LOW < 3 V.

VendorID	26
DeviceID HEX	8003B9
DeviceID DEC	8389561
Process data length	32 Bit
Process data structure A	Bit 0 = switching signal Q ₁ Bit 1 = switching signal Q ₂ Bit 2 ... 7 = empty Bit 8 ... 15 = scale Bit 16 ... 31 = measured value
Digital output	Q ₁ , Q ₂
Number	2 ^{1) 2)}
Type	Push-pull: PNP/NPN
Function	Q ₁ : Double layer digital output, Q ₂ : No material / single layer digital output, normally closed contact in each case
Maximum output current I _A	≤ 100 mA
Control input	1 x (active ≥ 18 V, deactivated ≤ 13 V or inputs not connected)

¹⁾ Outputs Q₁ and Q₂ short-circuit protected.

²⁾ Push-pull: PNP/NPN HIGH = U_V - (< 3 V) / LOW < 3 V.

Electronics

Supply voltage	20 V DC ... 30 V DC ¹⁾
Ripple	± 10 %
Current consumption	50 mA ²⁾
Power consumption	≤ 1.5 W ²⁾
Initialization time	< 300 ms
Ultrasonic frequency	400 Hz
Switching frequency	250 Hz
Response time	2.5 ms
Switching output	Push-pull: PNP/NPN
Switching output (voltage)	Push-pull: PNP/NPN HIGH = U _V - (< 3 V) / LOW < 3 V
Output current I_{max}	≤ 100 mA
Protection class	III ³⁾
Circuit protection	U _V connections, reverse polarity protected Output Q short-circuit protected
Connection type	
Supply voltage & I/O	Cable with plug M12, 5-pin, 2.045 m
Connection type Detail	
Length of male connector	44.8 mm
Length of cable	2 m
Cable material	PUR
Cable diameter	4.2 mm

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ Without load.

³⁾ Reference voltage DC 50 V.

Conductor cross section	0.25 mm ²
Pinouts for Supply voltage & I/O	
BN 1	+ (L+)
BK 4	Q ₁ / Q ₁ /C
BU 3	- (M)
WH 2	Q ₂ / Q ₂
GY 5	C3/MF

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ Without load.

³⁾ Reference voltage DC 50 V.

Mechanics

Sending axis	Straight
Thread size	M18 x 1
Housing material	Nickel-plated brass, PBT/PA
Sensing face material	Ultrasonic transducer: polyurethane foam, glass epoxy resin
Weight	Approx. 130 g

Ambient data

Ambient operating temperature	+5 °C ... +60 °C
Ambient temperature, storage	-40 °C ... +85 °C
Shock load	According to EN 60068-2-27
EMC	EN 60947-5-2 ¹⁾
Enclosure rating	IP65
UL File No.	NRKH.E191603 & NRKH7.E191603

¹⁾ The sensor complies with the electromagnetic compatibility (EMC) requirements for the industrial sector (Radio Safety Class A).

Certificates


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
cULus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓

Classifications

ECLASS 5.0	27270909
ECLASS 5.1.4	27270909
ECLASS 6.0	27270909
ECLASS 6.2	27270909
ECLASS 7.0	27270909
ECLASS 8.0	27270909

ECLASS 8.1	27270909
ECLASS 9.0	27270909
ECLASS 10.0	27270909
ECLASS 11.0	27270909
ECLASS 12.0	27270909
ETIM 5.0	EC002720
ETIM 6.0	EC002720
ETIM 7.0	EC002720
ETIM 8.0	EC002720
UNSPSC 16.0901	39121528


Dimensional drawing, sensor

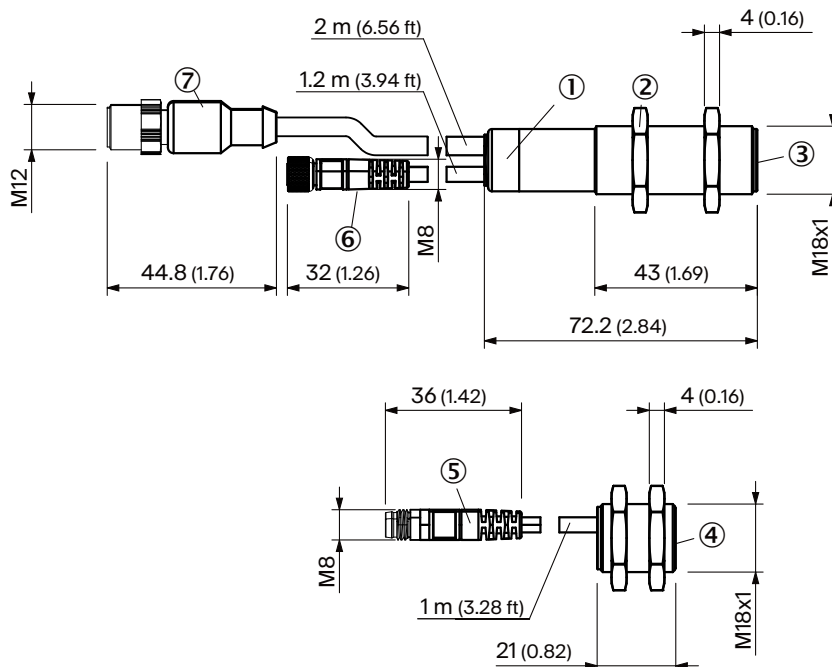

Dimensions in mm (inch)


- ① LED status indicator
- ② Fixing nuts, width 24 mm
- ③ receiver with evaluation unit
- ④ sender
- ⑤ Cable with connector M8, 3-pin
- ⑥ Cable with female connector, M8, 3-pin
- ⑦ cable with plug M12, 5-pin

Pinouts, see table Technical data: Electronics





Connector M12, 5-pin, A-coded

connection diagram



Supply voltage & I/O: plug, 5-pin

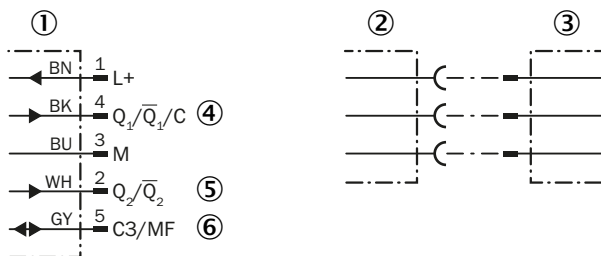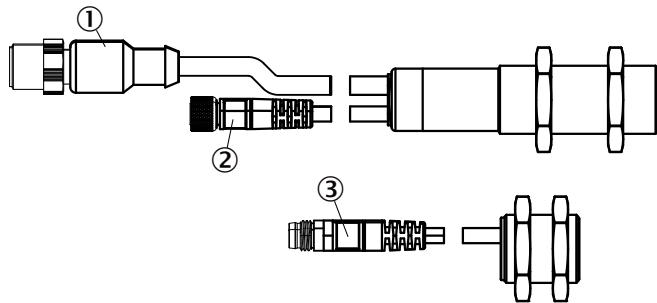

connection example



- ① connection cable for supply voltage and controls, with control inputs C3 and digital output Q1, Q2
- ② female connector M8x1, 3-pin, for connection with the sender
- ③ plug M8x1, 3-pin, for connection with the receiver
- ④ Switching output for “double layer”; IO-Link communication
- ⑤ Switching output for “no material / single layer”; IO-Link communication
- ⑥ Multifunctional input MF

Recommended accessories

Other models and accessories → www.sick.com/UD18

	Brief description	Type	part no.
network devices			
		IOLA2US-01101 (SiLink2 Master)	1061790
connectors and cables			
	<ul style="list-style-type: none"> • Description: Sensor/actuator cable, unshielded • Connection type head A: Female connector, M12, 5-pin, straight, A-coded • Connection type head B: Flying leads • Signal type: Sensor/actuator cable • Cable: 5 m, 5-wire, PVC • Application: Uncontaminated zones, Zones with chemicals 	YF2A15-050VB5XLEAX	2096240

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com