



fixing/ejection bracket for plug-in relay PT series and PT screw terminal, logical and PT spring-loaded terminal socket logical disconnection

product brand name		SIRIUS
product type designation		LZS
General technical data		
display version LED		No
reference code according to IEC 81346-2		U
Substance Prohibitance (Date)		05/01/2012
Net Weight		0.005 kg
Mechanical data		
product component plug-in socket		No
Auxiliary circuit		
number of NC contacts for auxiliary contacts		0
number of NO contacts for auxiliary contacts		0
number of CO contacts for auxiliary contacts		0
Connections/ Terminals		
product function removable terminal		No
Installation/ mounting/ dimensions		
mounting position		any
height		37.8 mm
width		27 mm
depth		54.2 mm
Ambient conditions		
ambient temperature		
• during storage		-25 ... +70 °C
• during transport		-25 ... +70 °C
Approvals Certificates		
Environment	General Product Approval	other

[Environmental Con-
firmations](#)



[Confirmation](#)

[Confirmation](#)

other



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT17021>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT17021>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT17021>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT17021&lang=en

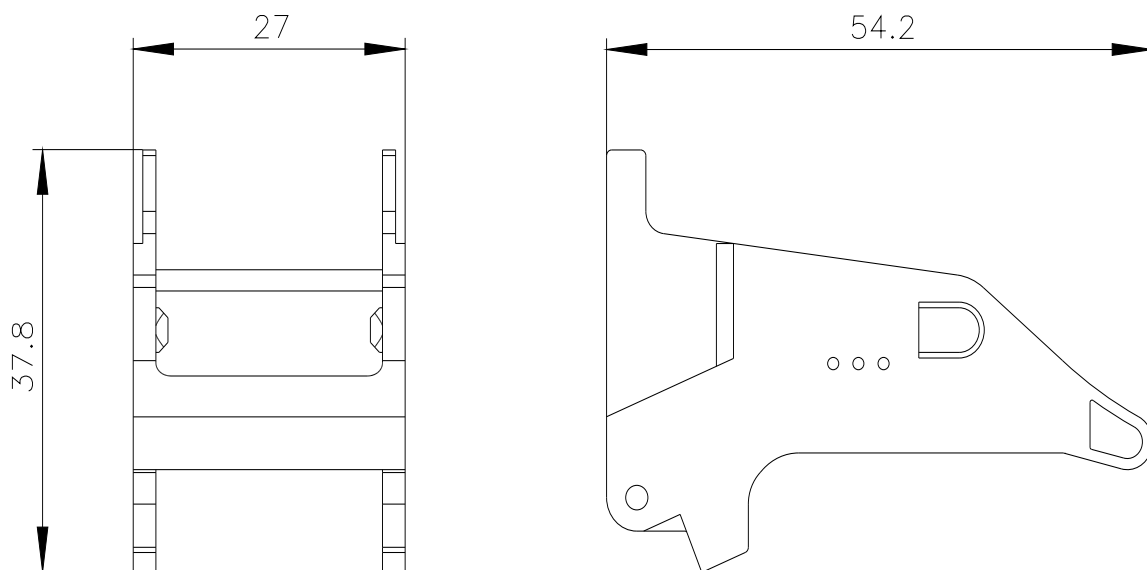

last modified:

10/22/2025 