

EverExceed®
power your applications



TUBULAR OPZV RANGE | GEL VRLA



GERMANY TECHNOLOGY

Specifications

- ◆ 20 years design life @ 25°C(77°F);
- ◆ Extraordinary energy-saving features in addition with robust reliability
- ◆ Maintenance-free (no topping up) during the whole service life
- ◆ Nominal capacity 100~3000 Ah C10
- ◆ Container material: ABS, UL 94-HB;
Optional ABS, UL 94V-0
- ◆ Robust tubular plate technology
- ◆ Very low gassing due to internal gas recombination
- ◆ Proof against deep discharge according to DIN 43539 T5
- ◆ Cells in compliance with DIN 40742 Completely recyclable
- ◆ The active material is manufactured from best purity lead (99.994%) to minimize the negative effects of impurities.

Applicable operating temperature range:

-40°C (-40°F) to +70°C (+158°F)

Ideal operating temperature range:

+20°C (+68°F) to +28°C (+82.4°F)

Storage time from a fully charged condition:

12 months at 20°C ~25°C/ 68°F~77°F.

For each 9°C / 15°F rise, reduce the storage time by half.

Applications

- ◆ Telecommunications
- ◆ Microwave radio systems
- ◆ Power generation plants
- ◆ Emergency lighting
- ◆ Photovoltaic / Solar

Innovative Features

- ◆ **Tubular positive plates:** Robust tubular plates consisting of a lead calcium antimony-free alloy, optimized for high corrosion resistances
- ◆ **Pasted negative plates:** Grid plate construction consisting of lead calcium alloy
- ◆ **Separators:** Micro porous and robust, for electrical separation of the positive and negative plates and optimized for low internal resistance
- ◆ **Housing:** ABS, on request flame retardant ABS according to UL 94 V-0
- ◆ **One way relief valve:** operates at low pressure and fitted with flame arrestor, release gas in case of excess pressure and protects the cell against atmosphere
- ◆ **Poles:** Screw connection for easy and safe assembly and maintenance-free connection with excellent conductivity
- ◆ **Post seals:** extremely high integrity post seal design to prevent electrolyte leakage and terminal corrosion
- ◆ **Connectors:** flexible fully insulated cable connectors screwed to the terminal with an insulated screw having a probe hole on the top for electrical measurement
- ◆ **Electrolyte:** Gel structure
- ◆ Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection.

Standard and Compliance

- ◆ DIN 40742;
- ◆ DIN 43539-T5;
- ◆ YD/T 1360-2005;
- ◆ UL1989
- ◆ IEC 60896-21/22-2004;
- ◆ IEC 61427-2005;
- ◆ Eurobat Guide - "long life".



Tubular OPzV Range Electrical Specifications & Dimensions

Part number	DIN Type	Nom. Voltage (V)	C10 AH to 1.80VPC	C100 AH to 1.80VPC	Outline Dimensions (mm)					Weight (kg)	Pole Pairs	Internal Resist. acc. to IEC 896-2 (mΩ)	Short Circuit Current acc. to IEC 896-2 (A)	Terminal
					Length (l)	Width (b/w)	Height (h1)	Height t (h2)	Installed Length (B/L)					
2TV020100	2 OPzV 100	2	105	130	103	206	355	390	113	11.6	1	1.3	1590	F-M8
2TV030150	3 OPzV 150	2	158	195	103	206	355	390	113	14.5	1	1.05	1880	F-M8
2TV040200	4 OPzV 200	2	210	260	103	206	355	390	113	18.5	1	0.53	2235	F-M8
2TV050250	5 OPzV 250	2	263	324	124	206	355	390	134	22.5	1	0.49	2710	F-M8
2TV060300	6 OPzV 300	2	315	388	145	206	355	390	155	26.5	1	0.45	3420	F-M8
2TV050350	5 OPzV 350	2	383	452	124	206	471	506	134	28.5	1	0.41	3450	F-M8
2TV060420	6 OPzV 420	2	446	544	145	206	471	506	155	33.5	1	0.38	4220	F-M8
2TV070490	7 OPzV 490	2	525	635	166	206	471	506	176	38.5	1	0.37	4100	F-M8
2TV060600	6 OPzV 600	2	630	777	145	206	646	681	155	47.0	1	0.38	4750	F-M8
2TV080800	8 OPzV 800	2	840	1026	210	191	646	681	220	63.0	2	0.33	6820	F-M8
2TV101000	10 OPzV 1000	2	1050	1283	210	233	646	681	220	77.5	2	0.32	8200	F-M8
2TV121200	12 OPzV 1200	2	1260	1540	210	275	646	681	220	91.0	2	0.30	9850	F-M8
2TV121500	12 OPzV 1500	2	1580	1959	210	275	796	831	220	112	2	0.30	10500	F-M8
2TV162000	16 OPzV 2000	2	2100	2519	210	399	772	807	223	150	3	0.29	14000	F-M8
2TV202500	20 OPzV 2500	2	2630	3148	212	487	772	807	223	189	4	0.29	17500	F-M8
2TV243000	24 OPzV 3000	2	3150	3778	212	576	772	807	223	225	4	0.25	21000	F-M8

Standards: INTERNATIONAL STANDARD—ISO9001:2008

Stationary Lead Acid Batteries

DIN40736, IEC60896-21/22 Valve Regulated Types


Electromagnetic Compatibility (EMC) CE:EN61000-6-2:2005, EN61000-6-3:2007

Container and Cover:


ABS, UL 94-HB

Optional ABS, UL 94V-0


Safety Vent Cell: Accurate Valve




11 Nm

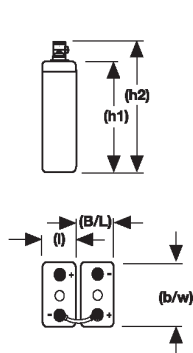


2 OPzV 100
up to
11 OPzV 770

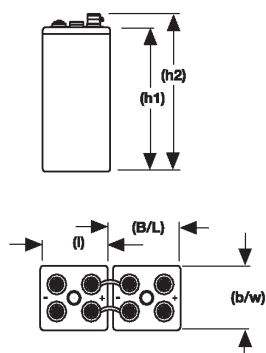

8 OPzV 800
up to
12 OPzV



16 OPzV 2000

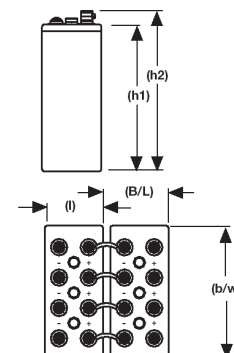

20 OPzV 2500
up to
24 OPzV 3000

EverExceed Tubular OPzV cell Discharge Data Amperes at 25°C

Part Number	DIN Type	Discharge Data Amps @ 25°C to 1.90VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	77.0	63.0	44.6	28.9	22.0	18.1	15.7	13.6	10.7	9.4	4.79
2TV030150	3 OPzV 150	116	94.5	67.0	43.4	33.1	27.2	23.6	20.5	16.1	14.2	7.19
2TV040200	4 OPzV 200	155	126	89.3	57.8	44.1	36.2	31.5	27.3	21.5	18.9	9.59
2TV050250	5 OPzV 250	193	158	116	72.5	55.7	45.2	39.9	35.7	27.3	23.1	12.1
2TV060300	6 OPzV 300	218	189	139	86.6	66.2	54.6	47	43.1	32.6	27.8	14.3
2TV050350	5 OPzV 350	232	205	152	103	79.8	66.2	55.7	52.5	41.0	34.7	16.8
2TV060420	6 OPzV 420	263	246	183	123	95.6	78.8	67.2	60.9	49.4	41.0	20.3
2TV070490	7 OPzV 490	307	287	213	144	111	92	78.2	71.4	57.8	48.3	24.1
2TV060600	6 OPzV 600	328	309	246	173	135	113	97.1	84.0	67.7	56.2	28.8
2TV080800	8 OPzV 800	437	412	328	231	181	151	130	112	90.3	75.1	37.5
2TV101000	10 OPzV 1000	546	515	410	289	226	189	162	141	112	93.5	47.0
2TV121200	12 OPzV 1200	655	617	491	347	271	227	194	168	135	112	56.2
2TV121500	12 OPzV 1500	667	630	548	410	323	261	223	196	162	134	68.5
2TV162000	16 OPzV 2000	893	840	731	546	431	349	296	260	215	179	93.9
2TV202500	20 OPzV 2500	1218	1050	914	683	538	435	370	326	269	223	117
2TV243000	24 OPzV 3000	1344	1260	1096	819	645	522	444	391	322	268	141

Part Number	DIN Type	Discharge Data Amps @ 25°C to 1.87VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	86.0	69.0	49.9	34.7	26.3	20.7	17.9	15.5	12.6	10.5	5.10
2TV030150	3 OPzV 150	129	104	74.9	52.0	39.4	31.1	26.8	23.3	18.9	15.8	7.58
2TV040200	4 OPzV 200	172	139	99.8	69.3	52.5	41.5	35.7	31.0	25.2	21.0	10.1
2TV050250	5 OPzV 250	214	173	125	86.1	66.2	52.0	45.2	37.8	31.5	26.3	12.9
2TV060300	6 OPzV 300	257	208	150	102.9	79.8	60.9	54	45.2	37.8	31.5	15.5
2TV050350	5 OPzV 350	263	227	166	111	84.5	69.3	59.9	52.5	42.5	35.7	18.1
2TV060420	6 OPzV 420	315	273	201	134	101.9	83.0	71.4	62.5	51.0	42.8	21.7
2TV070490	7 OPzV 490	368	318	249	167	127	104	89.3	78.2	63.8	46.2	25.3
2TV060600	6 OPzV 600	378	347	271	186	144	120	102.4	89.3	70.6	58.8	32.5
2TV080800	8 OPzV 800	504	462	361	248	192	160	137	119	94.1	78.2	41.0
2TV101000	10 OPzV 1000	630	578	452	310	239	200	170	148	118	97.7	51.1
2TV121200	12 OPzV 1200	756	693	542	372	288	239	205	179	141	118	61.1
2TV121500	12 OPzV 1500	830	756	624	454	357	288	245	214	171	143	75.2
2TV162000	16 OPzV 2000	1092	1008	832	605	476	383	327	286	229	190	101
2TV202500	20 OPzV 2500	1365	1260	1040	756	594	479	407	357	286	237	126
2TV243000	24 OPzV 3000	1628	1512	1239	907	714	575	489	428	342	286	151

Actual battery performance data may be +/-5% of figures shown above

EverExceed Tubular OPzV cell Discharge Data Amperes at 25°C

Part Number	DIN Type	Discharge Data Amps @ 25°C to 1.85 VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	97.0	76.0	51.5	32.5	24.7	19.9	17.1	14.9	12.1	10.3	5.50
2TV030150	3 OPzV 150	146	115	77.3	48.8	37.1	29.9	25.6	22.4	18.2	15.4	8.25
2TV040200	4 OPzV 200	195	153	103	65.1	49.4	39.9	34.1	29.9	24.2	20.5	11.0
2TV050250	5 OPzV 250	244	191	129	81.4	61.4	49.9	43.1	37.3	30.5	25.2	13.5
2TV060300	6 OPzV 300	293	230	155	97.7	73.7	59.9	51.5	45.2	36.2	30.5	16.2
2TV050350	5 OPzV 350	305	256	184	119	89.3	73.5	63.0	55.1	44.6	36.2	18.9
2TV060420	6 OPzV 420	365	308	221	143	107	88.2	75.6	66.2	53.6	44.7	22.7
2TV070490	7 OPzV 490	426	359	257	167	125	103	88.2	77.2	62.5	52.2	26.6
2TV060600	6 OPzV 600	466	397	302	202	153	126	107	92.4	74.0	61.4	33.2
2TV080800	8 OPzV 800	622	529	403	269	204	168	143	123	98.7	81.9	42.9
2TV101000	10 OPzV 1000	777	662	504	336	255	210	177	153	123	102	53.6
2TV121200	12 OPzV 1200	932	794	605	403	307	252	213	185	147	123	64.2
2TV121500	12 OPzV 1500	958	882	712	504	391	315	267	230	181	151	78.9
2TV162000	16 OPzV 2000	1277	1176	949	672	521	420	355	307	240	202	105
2TV202500	20 OPzV 2500	1596	1470	1187	840	651	525	443	382	300	252	132
2TV243000	24 OPzV 3000	1915	1764	1424	1008	781	630	532	459	361	302	158

Part Number	DIN Type	Discharge Data Amps @ 25°C to 1.80VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	106	81.0	53.5	33.4	26.3	20.7	17.6	15.1	12.3	10.5	5.70
2TV030150	3 OPzV 150	159	122	80.3	50.1	39.4	31.1	26.4	22.7	18.5	15.8	8.55
2TV040200	4 OPzV 200	212	162	107	66.8	52.5	41.5	35.2	30.2	24.7	21.0	11.4
2TV050250	5 OPzV 250	266	202	134	83.5	65.6	51.5	43.6	37.8	30.5	26.3	13.9
2TV060300	6 OPzV 300	318	242	161	100.3	78.8	61.7	52.3	45.7	36.5	31.5	16.8
2TV050350	5 OPzV 350	336	278	194	123	91.9	75.6	64.6	56.2	45.2	38.3	19.5
2TV060420	6 OPzV 420	403	334	233	148	110	90.1	77.5	67.4	54.2	44.6	23.5
2TV070490	7 OPzV 490	470	390	272	172	129	106	90.8	78.6	63.5	52.5	27.5
2TV060600	6 OPzV 600	517	441	328	209	158	129	108	94.5	75.6	63.0	34.2
2TV080800	8 OPzV 800	689	588	437	279	210	172	146	126	101	84.0	44.4
2TV101000	10 OPzV 1000	861	735	546	349	263	214	182	158	126	105	55.3
2TV121200	12 OPzV 1200	1033	882	655	419	315	257	217	189	151	126	66.5
2TV121500	12 OPzV 1500	1058	970	775	532	410	330	276	238	189	158	81.0
2TV162000	16 OPzV 2000	1411	1294	1033	710	546	439	368	318	251	210	108
2TV202500	20 OPzV 2500	1764	1617	1292	886	656	548	460	397	313	263	136
2TV243000	24 OPzV 3000	2117	1940	1550	1063	819	658	552	477	376	315	163

Actual battery performance data may be +/-5% of figures shown above

EverExceed Tubular OPzV cell Discharge Data Amperes at 25°C

Part Number	DIN Type	Discharge Data Amps @ 25°C to 1.75VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	119	87.0	58.0	34.5	26.3	21.0	17.9	15.5	12.6	10.5	6.10
2TV030150	3 OPzV 150	179	130	87.0	51.7	39.4	31.5	26.8	23.3	18.9	15.8	9.15
2TV040200	4 OPzV 200	238	173	116	68.9	52.5	42.0	35.7	31.1	25.2	21.0	12.2
2TV050250	5 OPzV 250	298	216	145	86.1	65.6	52.5	44.6	38.9	31.5	27.3	14.5
2TV060300	6 OPzV 300	358	259	165	103	78.8	63.0	53.6	46.6	37.8	31.5	17.7
2TV050350	5 OPzV 350	386	305	206	128	95.0	77.7	66.2	57.8	46.2	38.9	20.6
2TV060420	6 OPzV 420	464	365	247	153	114	93.2	79.4	69.3	55.4	46.7	24.5
2TV070490	7 OPzV 490	541	426	288	180	133	109	92.6	80.9	64.7	54.4	28.6
2TV060600	6 OPzV 600	592	491	353	218	164	132	111	97.0	76.9	64.1	35.2
2TV080800	8 OPzV 800	790	655	470	292	218	176	148	129	102	85.1	45.8
2TV101000	10 OPzV 1000	987	819	588	364	273	221	185	162	128	106	57.3
2TV121200	12 OPzV 1200	1184	983	706	438	328	265	222	194	153	127	68.5
2TV121500	12 OPzV 1500	1260	1109	866	567	423	342	286	246	194	161	83.5
2TV162000	16 OPzV 2000	1680	1478	1155	756	571	457	381	328	258	214	111
2TV202500	20 OPzV 2500	2100	1848	1444	945	662	571	477	410	323	267	139
2TV243000	24 OPzV 3000	2520	2218	1733	1134	857	686	571	491	389	320	168

Part Number	DIN Type	Discharge Data Amps @ 25°C to 1.70VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	131	91.0	58.5	35.1	26.3	21.2	18.1	15.7	12.6	11.1	6.40
2TV030150	3 OPzV 150	197	136	87.8	52.6	39.4	31.8	27.2	23.6	18.9	16.6	9.60
2TV040200	4 OPzV 200	263	181	117	70.1	52.5	42.4	36.2	31.5	25.2	22.1	12.8
2TV050250	5 OPzV 250	328	226	145	87.7	65.6	53.0	44.6	38.9	32.0	27.3	15.3
2TV060300	6 OPzV 300	394	271	174	106	78.8	63.6	53.6	46.7	37.8	32.0	18.5
2TV050350	5 OPzV 350	428	328	212	131	96.6	78.2	66.7	57.8	46.7	39.9	21.5
2TV060420	6 OPzV 420	515	394	255	158	117	94.0	80.3	69.3	55.7	47.3	25.4
2TV070490	7 OPzV 490	601	459	297	184	135	110	94.5	80.9	65.1	54.6	29.6
2TV060600	6 OPzV 600	668	542	369	254	167	133	112	97.1	77.2	65.1	36.3
2TV080800	8 OPzV 800	890	722	491	300	223	177	149	130	102	86.1	47.3
2TV101000	10 OPzV 1000	1113	903	614	375	278	222	186	162	128	107	59.4
2TV121200	12 OPzV 1200	1336	1084	738	450	334	267	224	194	154	128	71.2
2TV121500	12 OPzV 1500	1436	1222	920	595	441	352	293	251	195	162	86.6
2TV162000	16 OPzV 2000	1915	1630	1226	794	588	469	391	335	260	215	115
2TV202500	20 OPzV 2500	2394	2037	1533	991	735	586	487	418	326	269	144
2TV243000	24 OPzV 3000	2873	2444	1840	1189	882	704	585	502	391	323	174

Actual battery performance data may be +/-5% of figures shown above

EverExceed Tubular OPzV cell Discharge Data Watts at 25°C

Part Number	DIN Type	Discharge Data Watts @ 25°C to 1.90VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	109	100	80.0	56.0	43.6	35.7	30.5	26.8	21.0	17.3	9.50
2TV030150	3 OPzV 150	164	150	120	84.0	65.4	53.6	45.7	40.2	31.5	26.0	14.2
2TV040200	4 OPzV 200	219	200	160	112	87.2	71.4	60.9	53.6	42.0	34.7	18.9
2TV050250	5 OPzV 250	274	248	200	141	109	88.2	76.7	66.2	53.6	45.2	23.6
2TV060300	6 OPzV 300	329	299	238	168	131	107	91.4	79.8	65.1	55.7	28.8
2TV050350	5 OPzV 350	312	294	266	191	149	125	107	94.5	77.7	67.2	33.0
2TV060420	6 OPzV 420	375	353	316	228	180	149	128	113	93.5	80.9	39.8
2TV070490	7 OPzV 490	437	413	370	268	209	174	150	132	109	93.5	46.5
2TV060600	6 OPzV 600	468	443	410	315	259	218	189	167	137	119	56.8
2TV080800	8 OPzV 800	625	590	546	420	345	292	251	221	183	158	74.5
2TV101000	10 OPzV 1000	780	737	683	525	432	364	313	278	228	197	93.0
2TV121200	12 OPzV 1200	936	885	819	630	518	438	377	334	274	236	113
2TV121500	12 OPzV 1500	951	920	877	688	572	489	425	375	309	267	139
2TV162000	16 OPzV 2000	1269	1224	1168	917	761	652	567	500	412	355	186
2TV202500	20 OPzV 2500	1588	1533	1462	1146	952	814	709	625	515	444	231
2TV243000	24 OPzV 3000	1906	1839	1754	1374	1141	980	852	749	617	534	276

Part Number	DIN Type	Discharge Data Watts @ 25°C to 1.87VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	135	117	90.7	62.0	47.3	38.9	33.6	29.4	23.1	19.5	10.1
2TV030150	3 OPzV 150	203	176	136	93.0	70.9	58.3	50.4	44.1	34.7	29.2	15.1
2TV040200	4 OPzV 200	270	234	181	124	94.5	77.7	67.2	58.8	46.2	38.9	20.1
2TV050250	5 OPzV 250	338	292	225	154	119	97.7	83.0	72.5	58.8	49.4	25.6
2TV060300	6 OPzV 300	405	352	269	186	142	119	99.8	87.2	70.4	59.9	30.6
2TV050350	5 OPzV 350	389	368	298	212	166	138	118	104	84.0	72.5	35.7
2TV060420	6 OPzV 420	467	441	358	254	200	165	142	124	101	87.2	43.0
2TV070490	7 OPzV 490	545	516	418	296	232	193	166	145	118	102	50.1
2TV060600	6 OPzV 600	580	553	466	356	291	242	209	184	149	128	61.2
2TV080800	8 OPzV 800	773	738	622	474	386	323	278	245	200	172	81.5
2TV101000	10 OPzV 1000	966	922	777	593	452	405	348	307	249	214	102
2TV121200	12 OPzV 1200	1159	1107	932	711	581	486	417	366	298	257	123
2TV121500	12 OPzV 1500	1175	1150	1008	781	643	543	469	413	336	289	151
2TV162000	16 OPzV 2000	1567	1533	1344	1042	857	722	625	550	447	385	202
2TV202500	20 OPzV 2500	1959	1916	1680	1302	1071	90	781	688	560	482	252
2TV243000	24 OPzV 3000	2351	2298	2016	1561	1287	1084	938	826	672	578	305

Actual battery performance data may be +/-5% of figures shown above

EverExceed Tubular OPzV cell Discharge Data Watts at 25°C

Part Number	DIN Type	Discharge Data Watts @ 25°C to 1.85 VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	175	143	106.0	70.0	54.0	43.1	36.7	32.1	25.2	21.0	10.8
2TV030150	3 OPzV 150	263	214	159	105	81.0	64.6	55.1	48.1	37.8	31.5	16.2
2TV040200	4 OPzV 200	350	285	212	140	108	86.1	73.5	64.1	50.4	42.0	21.6
2TV050250	5 OPzV 250	437	356	266	175	133	109	91.4	79.8	64.1	52.5	26.5
2TV060300	6 OPzV 300	526	427	320	209	160	130	110	95.6	76.7	64.1	31.9
2TV050350	5 OPzV 350	532	459	357	244	190	154	130	114	91.4	76.7	37.2
2TV060420	6 OPzV 420	637	549	427	291	227	187	156	138	110	91.4	44.6
2TV070490	7 OPzV 490	744	639	501	340	267	218	184	161	128	107	52.5
2TV060600	6 OPzV 600	785	696	574	419	334	274	231	204	164	139	63.8
2TV080800	8 OPzV 800	1047	928	767	560	445	364	310	272	217	186	84.5
2TV101000	10 OPzV 1000	1307	1159	958	697	558	456	385	338	272	231	107
2TV121200	12 OPzV 1200	1571	1391	1149	838	668	547	463	406	326	279	128
2TV121500	12 OPzV 1500	1600	1477	1255	941	756	624	528	465	374	312	158
2TV162000	16 OPzV 2000	2135	1971	1674	1254	1008	831	704	620	497	417	210
2TV202500	20 OPzV 2500	2668	2463	2092	1568	1260	1037	881	774	622	522	263
2TV243000	24 OPzV 3000	3203	2957	2511	1881	1512	1246	1055	930	744	627	315

Part Number	DIN Type	Discharge Data Watts @ 25°C to 1.80VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	180	147	109	72	55	44	37.8	33.1	25.7	21.5	11.0
2TV030150	3 OPzV 150	270	220	164	108	83	67	56.7	49.7	38.6	32.3	16.5
2TV040200	4 OPzV 200	360	293	218	144	111	89	75.6	66.2	51.5	43.1	22.0
2TV050250	5 OPzV 250	450	366	274	181	138	112	94.5	81.9	66.2	54.6	27.0
2TV060300	6 OPzV 300	542	441	330	215	165	134	113	98.7	78.8	66.2	32.5
2TV050350	5 OPzV 350	549	473	369	251	196	160	134	118	94.5	78.8	37.8
2TV060420	6 OPzV 420	657	566	441	300	234	192	162	142	113	94.5	45.2
2TV070490	7 OPzV 490	768	659	517	351	275	225	189	166	132	110	53.4
2TV060600	6 OPzV 600	810	717	592	432	344	282	238	210	169	143	64.8
2TV080800	8 OPzV 800	1079	957	791	576	459	376	319	280	224	191	86.8
2TV101000	10 OPzV 1000	1348	1195	987	719	574	469	397	349	280	238	110
2TV121200	12 OPzV 1200	1619	1434	1184	864	689	564	478	419	336	259	131
2TV121500	12 OPzV 1500	1650	1523	1294	970	779	643	545	480	385	321	163
2TV162000	16 OPzV 2000	2201	2032	1725	1293	1040	856	726	638	512	429	216
2TV202500	20 OPzV 2500	2751	2540	2157	1616	1299	1070	908	798	641	538	267
2TV243000	24 OPzV 3000	3301	3048	2588	1938	1559	1285	1088	959	768	646	324

Actual battery performance data may be +/-5% of figures shown above

EverExceed Tubular OPzV cell Discharge Data Watts at 25°C

Part Number	DIN Type	Discharge Data Watts @ 25°C to 1.75VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	204	163	118	76.0	57.0	45.7	38.3	33.6	25.7	21.5	11.5
2TV030150	3 OPzV 150	306	245	178	114	85.5	68.6	57.5	50.4	38.6	32.3	17.3
2TV040200	4 OPzV 200	408	326	237	152	114	91.4	76.7	67.2	51.5	43.1	23.0
2TV050250	5 OPzV 250	511	407	296	190	142	116	95.6	83.0	66.2	54.6	28.1
2TV060300	6 OPzV 300	614	487	357	228	170	138	114	99.8	78.8	66.2	33.2
2TV050350	5 OPzV 350	625	524	411	270	206	166	139	120	94.5	78.8	38.8
2TV060420	6 OPzV 420	751	629	492	323	246	201	167	144	113	94.5	47.0
2TV070490	7 OPzV 490	875	733	574	376	288	233	194	168	132	110	54.5
2TV060600	6 OPzV 600	932	811	671	469	364	298	249	216	171	144	66.3
2TV080800	8 OPzV 800	1244	1082	896	625	487	399	333	289	228	193	89.6
2TV101000	10 OPzV 1000	1554	1352	1118	782	608	497	415	360	285	240	114
2TV121200	12 OPzV 1200	1865	1623	1342	939	729	596	499	433	342	290	134
2TV121500	12 OPzV 1500	1932	1736	1445	1076	843	677	564	489	385	321	166
2TV162000	16 OPzV 2000	2576	2315	1927	1435	1125	904	752	651	512	429	219
2TV202500	20 OPzV 2500	3219	2893	2409	1794	1405	1130	939	814	641	538	272
2TV243000	24 OPzV 3000	3864	3473	2891	2153	1687	1357	1129	978	768	646	328

Part Number	DIN Type	Discharge Data Watts @ 25°C to 1.70VPC										
		Discharge Time in Minutes		Discharge Time in hours								
		15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
2TV020100	2 OPzV 100	227	174	123	76.0	57.0	45.7	38.3	33.6	25.7	21.5	11.9
2TV030150	3 OPzV 150	340	261	185	115	85.5	68.6	57.5	50.4	38.6	32.3	17.8
2TV040200	4 OPzV 200	453	348	247	153	114	91.4	76.7	67.2	51.5	43.1	23.7
2TV050250	5 OPzV 250	567	435	309	192	143	116	95.6	83.0	66.2	54.6	28.9
2TV060300	6 OPzV 300	680	522	372	230	170	138	114	99.8	78.8	66.2	34.1
2TV050350	5 OPzV 350	689	567	429	278	206	166	139	120	94.5	78.8	39.7
2TV060420	6 OPzV 420	826	681	516	334	247	201	167	144	113	94.5	47.9
2TV070490	7 OPzV 490	964	794	602	387	288	233	194	168	132	110	55.6
2TV060600	6 OPzV 600	1043	896	721	492	371	298	249	216	171	144	67.5
2TV080800	8 OPzV 800	1390	1194	962	656	494	399	333	289	228	193	91.8
2TV101000	10 OPzV 1000	1736	1491	1202	820	618	497	415	360	285	240	117
2TV121200	12 OPzV 1200	2083	1790	1442	985	741	596	499	433	342	290	138
2TV121500	12 OPzV 1500	2172	1931	1623	1147	848	677	564	489	385	321	171
2TV162000	16 OPzV 2000	2896	2575	2163	1530	1130	904	752	651	512	429	225
2TV202500	20 OPzV 2500	3620	3218	2707	1912	1413	1130	939	814	641	538	278
2TV243000	24 OPzV 3000	4343	3862	3249	2294	1695	1357	1129	978	768	646	336

Actual battery performance data may be +/-5% of figures shown above


Long duration discharge Capacity (Ah)

Part Number	DIN Type	C ₂₄	C ₄₈	C ₁₀₀	C ₁₂₀	C ₂₄₀
		1.85 VPC – Discharge Data in Ampere Hour at 25°C				
2TV020100	2 OPzV 100	113	125	129	131	133
2TV030150	3 OPzV 150	169	188	193	197	200
2TV040200	4 OPzV 200	225	250	257	262	266
2TV050250	5 OPzV 250	281	312	321	328	334
2TV060300	6 OPzV 300	337	375	384	392	399
2TV050350	5 OPzV 350	393	437	448	457	465
2TV060420	6 OPzV 420	472	525	539	550	559
2TV070490	7 OPzV 490	552	613	629	642	653
2TV060600	6 OPzV 600	674	750	769	785	799
2TV080800	8 OPzV 800	890	1000	1016	1037	1055
2TV101000	10 OPzV 1000	1113	1250	1270	1296	1318
2TV121200	12 OPzV 1200	1333	1500	1525	1556	1582
2TV121500	12 OPzV 1500	1639	1830	1940	1980	1941
2TV162000	16 OPzV 2000	2185	2440	2494	2545	2588
2TV202500	20 OPzV 2500	2732	3050	3117	3181	3235
2TV243000	24 OPzV 3000	3279	3660	3741	3817	3882


Part Number	DIN Type	C ₂₄	C ₄₈	C ₁₀₀	C ₁₂₀	C ₂₄₀
		1.80 VPC – Discharge Data in Ampere Hour at 25°C				
2TV020100	2 OPzV 100	114	126	130	132	134
2TV030150	3 OPzV 150	171	190	195	199	202
2TV040200	4 OPzV 200	227	253	260	265	269
2TV050250	5 OPzV 250	284	315	324	331	337
2TV060300	6 OPzV 300	340	379	388	396	403
2TV050350	5 OPzV 350	397	441	452	462	470
2TV060420	6 OPzV 420	477	530	544	556	565
2TV070490	7 OPzV 490	558	619	635	648	660
2TV060600	6 OPzV 600	681	758	777	793	807
2TV080800	8 OPzV 800	899	1010	1026	1047	1066
2TV101000	10 OPzV 1000	1124	1263	1283	1309	1331
2TV121200	12 OPzV 1200	1346	1515	1540	1572	1598
2TV121500	12 OPzV 1500	1655	1848	1959	2000	1960
2TV162000	16 OPzV 2000	2207	2464	2519	2570	2614
2TV202500	20 OPzV 2500	2759	3081	3148	3213	3267
2TV243000	24 OPzV 3000	3312	3697	3778	3855	3921

Actual battery performance data may be +/-5% of figures shown below

Performance Curve

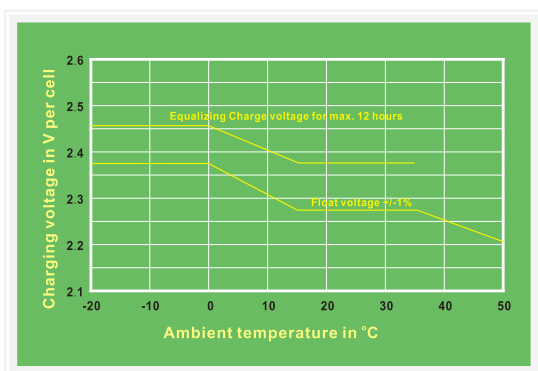


For continuous charging we recommend a voltage of 2.25 V. The charging voltage must be compensated to the curve for a continuously different battery ambient temperature.

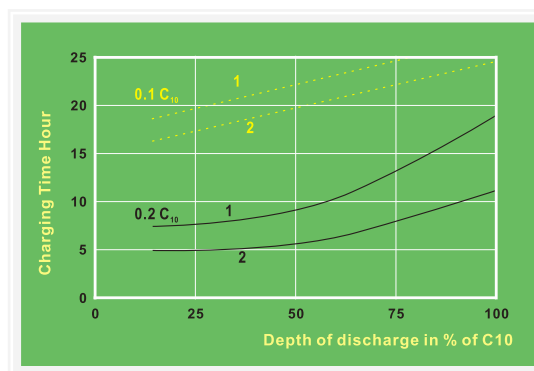


Recharging time in relation to the initial charging current at 25°C.

----- State of charge 100 % ——— State of charge 90 %



Charge voltage: 1: 2.25 V/C
 2: 2.40 V/C

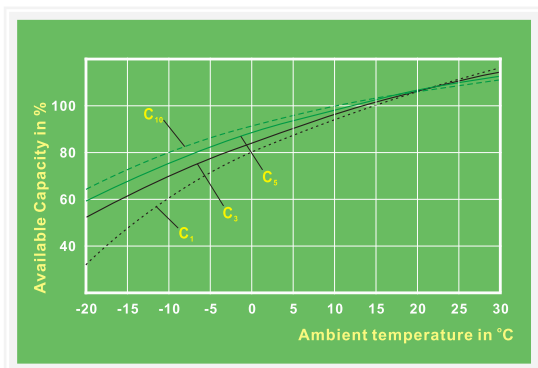


Available capacity in relation to ambient temperature

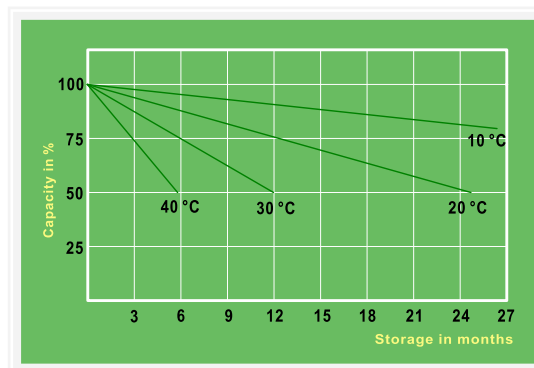

Self-discharge in relation to the storage temperature

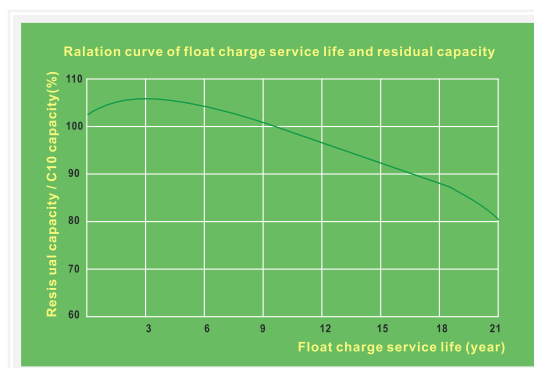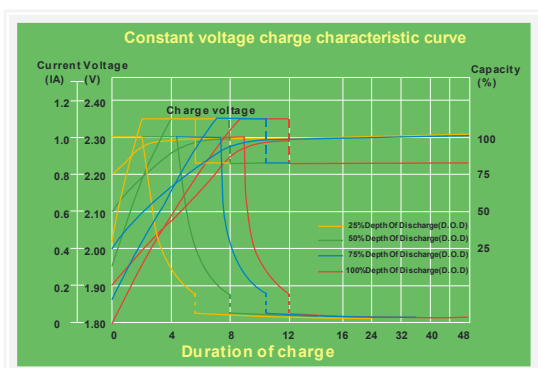

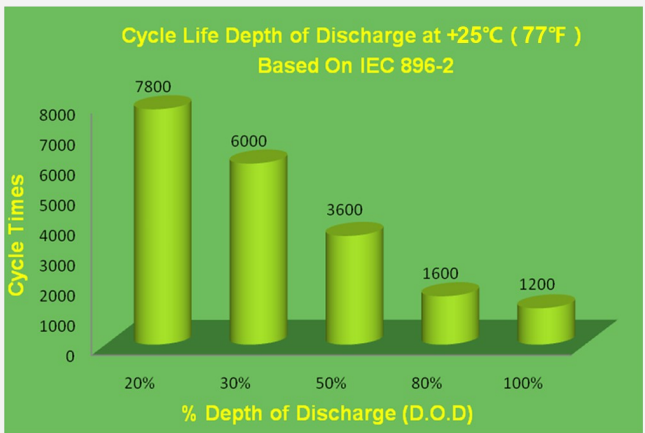




BATTERY CYCLING ABILITY

The EverExceed's Tubular OPzV Range Battery excels in cycling applications. This Range are capable of 6800+

TYPICAL CYCLIC PERFORMANCE

CAPACITY WITHDRAWN	CYCLES
100%	1200
80%	1600
50%	3600
30%	6000
20%	7800

3500 cycles to 50% DoD and 5600 to over 30% DoD

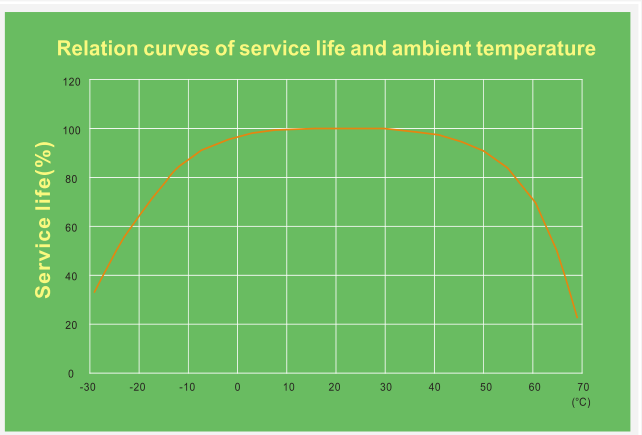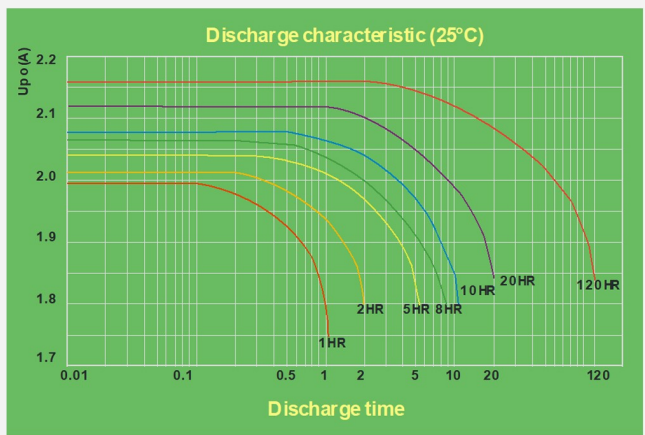

EverExceed[®]

power your applications



EverExceed | Empower, Energize, Exceed the Energy you Expect forever.



Headquarter:

Shenzhen EverExceed Industrial Co., Ltd

📍 Floor 19, Kechuang Building Hengchangrong
High TechPark, Dezheng Road, Shiyan Bao'an
District, Shenzhen.

🌐 www.everexceed.com

✉ marketing@everexceed.com

Branch Company:

EverExceed International Company Limited (HK)

📍 19H Maxgrand Plaza No3 Tai Yau St San PO Kong KLN Hongkong

✉ info@everexceed.com

EverExceed Corporation Ltd. (UK)

📍 Unit G25 WaterFront Studios, 1 Dock Road, London, United Kingdom

✉ Europe@everexceed.com